


### SPECIFICATIONS

Size	Metric	British
Max. Working Height <b>A</b>	22.00m	72ft 2in
Max. Platform Height <b>B</b>	20.00m	65ft 7in
Overall Length <b>C</b>	4.95m	16ft 3in
Overall Width <b>D</b>	2.46m	8ft 1in
Overall Height(Rails Up) <b>E</b>	3.86m	12ft 8in
Overall Height(Rails Down) <b>F</b>	3.00m	9ft 10in
Platform Size(Length×Width)	4.59m×2.25m	15ft 1in × 7ft 5in
Platform Extension Size <b>G</b>	2.70m	8ft 10in
Ground Clearance	0.40m	1ft 4in
Wheelbase <b>H</b>	3.30m	10ft 10in
Turning Radius(Inside/Outside)	1.25m/3.40m	4ft 1in/11ft 2in
Tyres	36×14-20	36×14-20

Performance		
S.W.L	750kg	1653lb
S.W.L On Extension	750kg	1653lb
Max. Occupants	4	4
Gradeability	40%	40%
Travel Speed(Stowed)	4.7km/h	2.92mph
Travel Speed(Raised)	0.4km/h	0.25mph
Max. Working Slope	X-2°/Y-3°	X-2°/Y-3°
Up/Down Speed	75/75sec	75/75sec

Weight		
Overall Weight	13000kg	28660lb

Power		
Diesel Engine	Deutz TD2.9 L4/36.4kW	Deutz TD2.9 L4/36.4kW
Diesel Tank	100L	26gal
Hydraulic Tank	150L	40gal

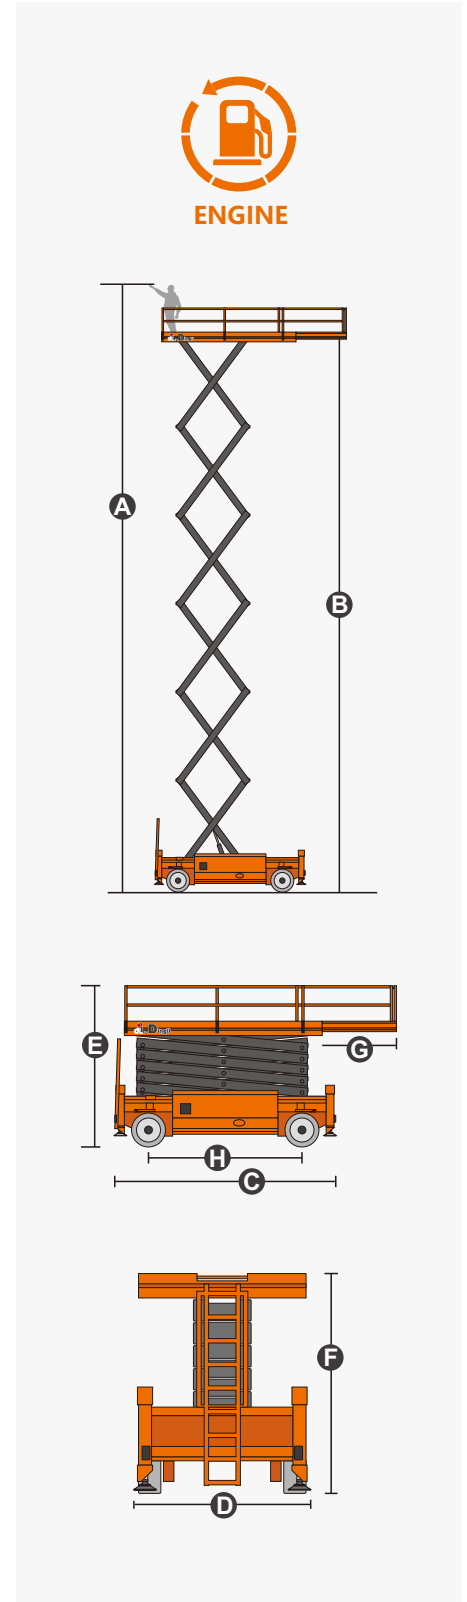

## FEATURES

### Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Automatic One-Way Platform Extension Deck
- Four-Wheel Drive
- Four-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height



### ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road,Deqing,Zhejiang P.R.C 313219

Telephone: +86(572)8681688

E-Mail: [export@cndingli.com](mailto:export@cndingli.com)

[Https://en.cndingli.com](https://en.cndingli.com)