


SPECIFICATIONS

| Size | Metric | British |
|--------------------------------------|-------------|------------------|
| Max. Working Height | 20.09m | 65ft 11in |
| Max. Platform Height | 18.09m | 59ft 4in |
| Max. Operating Range(+0.6m) | 11.26m | 36ft 11in |
| Max. Platform Range | 10.66m | 35ft |
| Overall Length(Stowed) | 8.37m | 27ft 6in |
| Overall Length(Transport) | 6.54m | 21ft 5in |
| Overall Width(Stowed) | 2.33m | 7ft 8in |
| Overall Height(Stowed) © | 2.55m | 8ft 4in |
| Overall Height(Transport) | 2.57m | 8ft 5in |
| Platform Size(Length \times Width) | 1.83m×0.79m | 6ft×2ft 7in |
| Turntable Tailswing | 0.72m | 2ft 4in |
| Ground Clearance ① | 0.31m | 1ft |
| Wheelbase 📵 | 2.30m | 7ft 7in |
| Turning Radius(Inside/Outside) | 2.92m/4.49m | 9ft 7in/14ft 9in |
| Tyres | 315/55 D20 | 315/55 D20 |
| Max. Up And Over Clearance | 8.23m | 27ft |
| Max. Down Probing Depth | 1.90m | 6ft 3in |

| Performance | | |
|----------------------|----------------|----------------|
| S.W.L | 250kg | 551lb |
| Max. Occupants | 2 | 2 |
| Gradeability | 35% | 35% |
| Travel Speed(Stowed) | 6.0km/h | 3.7mph |
| Travel Speed(Raised) | 1.1km/h | 0.7mph |
| Max. Working Slope | X-5°/Y-5° | X-5°/Y-5° |
| Turret Rotation | 360°Continuous | 360°Continuous |
| Platform Rotation | 180° | 180° |
| Jib Movement | 132° | 132° |

| Weight | | | |
|----------------|--------|---------|--|
| Overall Weight | 8260kg | 18210lb | |

| Power | | |
|----------------|---------------------|---------------------|
| Diesel Engine | FIRMAN AN192F/7.6kW | FIRMAN AN192F/7.6kW |
| Battery | 48V/320Ah | 48V/320Ah |
| Charger | 48VDC/60A | 48VDC/60A |
| Driving Motor | 34VAC/9kW | 34VAC/9kW |
| Lifting Motor | 34VAC/13kW | 34VAC/13kW |
| Diesel Tank | 30L | 7.9gal |
| Hydraulic Tank | 145L | 38gal |
| | | |

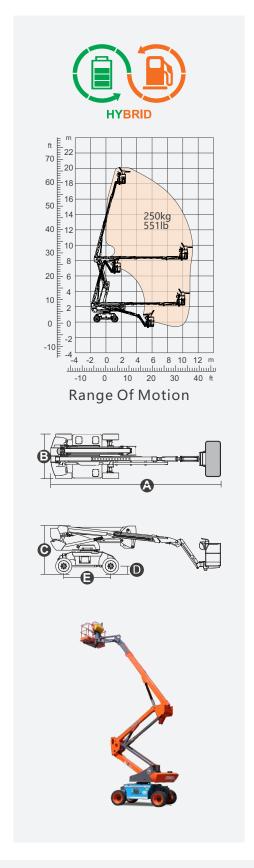





BA20CHRT Modular Boom Series

FEATURES

Standard Items

- 1.50m (4ft 11in) Jib
- Front Oscillating Axle
- Two-Wheel Steering
- Four-Wheel Drive
- Self-Leveling Platform
- 180° Left And Right Swing Platform
- Proportional Joystick Controls
- Thumb Rocker Steer
- Drive Enable
- AC Power Cord To Platform
- Tilt Alarm
- Descent Alarm
- Flash
- Horn
- Hour Meter
- Integral Integrated Special Drive Axle For Construction Machinery
- 360° Continuous Turntable Rotation
- Positive Traction Four Wheel Drive
- Platform Load Sense System
- Fault Diagnosis System
- Operator Anti-crushing Protection System
- Harsh Environment Kits
- 12V DC Auxiliary Power
- Battery 48V/320Ah
- Driving Motor 9kW 4834rpm
- Lifting Motor 13kW 1855rpm







Working Height-20m





Hybrid-H



Rough Terrain-RT



Elevated Platform Services

40 Hands Road, Middleton, Christchurch P. 0800 3773979 E. office@epsnz.co.nz epsnz.co.nz

