




SPECIFICATIONS

Dimension	Metric	British
Max. Working Height 🗛	10.00m	32ft 10in
Max. Platform Height B	8.00m	26ft 3in
Overall Length ©	2.48m	8ft 2in
Overall Width ()	1.15m	3ft 9in
Overall Height(Rails Up)	2.36m	7ft 9in
Overall Height(Rails Down)	1.83m	6ft
Platform Size(Length ×Width)	2.27m×1.12m	7ft 5in×3ft 8in
Platform Extension Size	0.90m	2ft llin
Ground Clearance(Stowed/Raised)	0.10m/0.019m	4in/lin
Wheelbase (1.87m	6ft 2in
Turning Radius(Inside/Outside)	0m/2.10m	0in/6ft 11in
Tyres	φ381×127mm	φ381×127mm

Performance		
S.W.L	450kg	992lb
S.W.L on Extension	113kg	249lb
Max. Occupants (Indoor/Outdoor)	2/2	2/2
Gradeability	25%	25%
Travel Speed(Stowed)	6.0km/h	3.73mph
Travel Speed(Raised)	0.8km/h	0.50mph
Max. Working Slope	X-1.5°/Y-3°	X-1.5°/Y-3°
Up/Down Speed	33/35sec	33/35sec

Weight		
Overall Weight	2750kg	6062lb

Power		
Hydraulic Tank	20L	5.3gal
Lithium Battery	28.8V/175Ah	28.8V/175Ah
Charger	28V/30A	28V/30A
Driving Motor	2×15VAC/0.87kW	2×15VAC/0.87kW
Lifting Motor	15VAC/3.42kW	15VAC/3.42kW

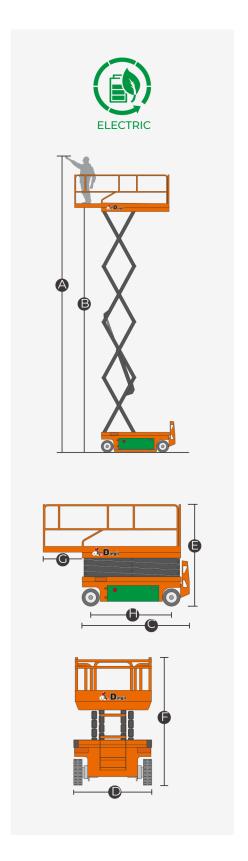



Scissor Lifts Series



FEATURES

Standard Items

- · Proportional Joystick Controls
- · Self-lock Gate On Platform
- · Drivable At Full Height
- · Non-Marking Tires
- · Two-Wheel Drive
- · Two-Wheel Steering
- · Automatic Brake System
- · Emergency Descent System
- · Cylinder Holding Valve
- · Onboard Diagnostic System
- · Tilt Alarm
- · All Motion Alarm
- · Horn
- · Hour Meter
- · Safety Arm For Troubleshooting
- · Standard Transport Forklift Holes
- · One-Way Platform Extension Deck
- · Charging Protection System
- · Flashing LED Beacon
- · Foldable Guard Rails
- · Automatic Pothole Protection
- · Drive Enable
- · Charging Indicator
- · Manual Brake Release
- · Lanyard Attachment Point



- . Platform Load Sense System
- . Emergency Stop Button
- . Hydraulic oil receiver
- . Pure electric steering system
- . Kinetic energy recovery system



ZHEJIANG DINGLI MACHINERY CO., LTD.

104 Carbine road, Mount Wellington 0800 DINGLI (346 454)

www.accessspecs.co.nz



